



目录 / NEW

■ 草坪车轮胎/Lawn cart tire	1-6
■ 卡丁车轮胎/Karting tire	7-10
■ 扫雪车轮胎/Snowplow tire	11-12
■ 高尔夫球车观光车轮胎/Golf cart.Sightseeing bus tire	13-14
■ 小农机轮胎/Small agricultural machinery tire	15-18
■ 全地形ATV轮胎/All Terrain ATV tires	19-25
■ 拖车轮胎/Trailer tires	26
■ 手推车轮胎/Wheelbarrow tires	27-31
■ 摩托车轮胎/Motorcycle tires	32-53
■ 发泡轮/PU wheel	54-56
■ 农用车钢圈/Steel rims for agricultural vehicles	57
■ 草坪车、工具车钢圈/ Steel rims for lawn cart, tool cart	58
■ 高尔夫、沙滩车钢圈/ Steel rims for golf, beach bike	59
■ 拖车、雪地车钢圈/ Steel rims for trailer, Snowmobile	60
■ 特种车钢圈/ Steel rims for special vehicle	61
■ 车间仓库/Workshop warehouse	62-63



CT558 TURF **LAWN & GARDEN**

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
9X3.50-4	4PR TL	226	85	300	30	4x2.6"
4.10/3.50-4	4PR TL	268	94	300	24	4x2.6"
10X4-4	2PR TL	262	94	330	30	4x2.6"
11X4.00-4	4PR TL	271	103	330	30	4x2.6"
13x4.00-6	4PR TL	330	99	400	30	6x2.1"
13x5.00-6	4PR TL	322	120	400	40	6x3.5"
13x6.50-6	4PR TL	335	152	365	30	6x4.00"
15x6.00-6	4PR TL	368	157	400	20	6x4"
16x6.50-8	4PR TL	404	160	415	28	8x5.375"
18x6.50-8	4PR TL	460	165	500	30	8x5.375"
18x8.50-8	4PR TL	456	215	815	22	8x7"
18x9.50-8	4PR TL	470	236	1040	24	8x7"
20x8.00-8	4PR TL	498	226	950	22	8x6"
20x10-8	4PR TL	499	246	1190	22	8x7"



CT518

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
18X8.50-8	4PR TL	452	218	710	22	8X7"
18X8.50-10	4PR TL	453.5	207	750	22	10X7"
20X10-8	4PR TL	500	242	1200	22	8X8"
20X10-10	4PR TL	500	235	1180	22	10X8"
20X8-10	4PR TL	490	194	810	25	10X7"
22X9.5-12	4PR TL	551	232	1120	20	12X8"
22X11-10	4PR TL	556	280	1350	22	10X8.5"
23X8.5-12	4PR TL	565	217	1120	22	12X7"
23X9.5-12	4PR TL	568	227	1200	20	12X8"
23X10.5-12	4PR TL	578	258	1350	20	12X8.5"
24X9.5-12	4PR TL	600	238	1350	20	12X7"
26X12-12	4PR TL	644	285	1800	20	12X8.5"



CT558A

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
10X3(300-5)	2PR TL	260	78	110	40	5x2.75"
10.0X3.5	2PR TL	260	88	154	30	6x2.15"



CT528

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
15x6.00-6	4PR TL	366	155	260	20	6x4.5"
18x8.50-8	4PR TL	450	213	370	22	8x7"



CT808

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
20x10-8	4PR TL	494	246	1190	22	8x7 "



CT401

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
11x4.00-5	4PR TL	279	104	325	46	5x3 "
13X5.00-6	4PR TL	325	123	440	40	6x3.5 "
140-6	10PR TL	327	127	815	35	6x3.5 "
13X6.50-6	4PR TL	330	146	600	40	6x4.0 "
4.00-6	2PR TL	350	98	325	20	6x2.1 "
14X400-6	4PR TL	355	100	285	26	6x3.3 "
15X6.00-6	4PR TL	363	153	570	30	6x4 "
4.00-8	2PR TL	400	100	435	20	8x2.5 "
16X6.50-8	4PR TL	404	168	715	36	8x5.375 "
18X8.50-8	4PR TL	443	215	815	22	8x7 "
26X12-12	12PR TL	640	300	3000	62	12x10.5 "



CT513

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
13x5.00-6	4PR TL	322	122	440	40	6x3.5 "
13x6.50-6	4PR TL	333	160	460	28	6x4.5 "
15x6.00-6	4PR TL	365	160	570	30	6x4.0 "
16x6.50-8	4PR TL	406	160	620	28	8x5.375 "
16x7.50-8	4PR TL	450	178	415	22	8x5.375 "
18x6.50-8	6PR TL	450	168	815	20	8x5.375 "
18x8.50-8	4PR TL	460	210	815	22	8x7.0 "
18x8.50-10	4PR TL	455	205	815	22	10x7 "
18x9.50-8	2PR TL	460	236	1040	24	8x7.0 "
20X6.5-10	4PR TL	498	170	840	24	10x5.5 "
20x8.00-8	4PR TL	494	222	905	22	8x5.5 "
20x8.00-10	4PR TL	495	215	895	24	10x7.00 "
20x10-8	4PR TL	505	244	1190	22	8x7.5 "
20x10-10	4PR TL	493	246	1160	22	10x7.00 "
22X10-8	4PR TL	526	250	1160	20	8x7 "
22x10-12	4PR TL	551	234	1235	22	12x8.5 "
22x10.5-12	4PR TL	560	264	1290	22	12x8.5 "
22X11-10	4PR TL	545	254	1160	22	10x7 "
20x12-10	4PR TL	494	285	1320	20	10x8.5 "
24x12-12	4PR TL	606	290	1700	20	12x10.5 "
24x12-14	4PR TL	595	290	1700	20	14x9.5 "
26x12-12	6PR TL	655	310	3020	50	12x13 "



CT500

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
16x6.50-8	4PR TL	406	160	620	28	8x5.375 "
18x7.50-8	4PR TL	457	193	795	24	8x5.375 "
18x9.50-8	4PR TL	460	236	1040	24	8x7.5 "
20x8-10	4PR TL	510	218	1040	36	10x6 "
20x10-10	6PR TL	501	240	1650	40	10x8 "
22x8.50-12	4PR TL	550	210	1235	22	12x7 "
22x10-12	4PR TL	551	234	1235	22	12x7 "
22x12-12	4PR TL	551	285	1700	20	12x8.5 "



CT506

LAWN&GARDEN

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
15x6.50-8	4PR TL	406	160	620	28	8x5.375"
22X9.50-10	4PR TL	560	236	1200	22	10x7"



CT404

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
8X3.00-4	4PR TL	210	73	300	30	4x2.4"
9X3.50-4	2PR TL	229	94	300	50	4x2.4"
4.10/3.50-4	4PR TL	258	97	300	30	4x2.6"
11X6.00-5	4PR TL	260	129	440	50	5x3"
11X3.6-5	4PR TL	263	102	350	50	5x2.6"
11X3.00-5	4PR TL	269	81	253	50	5x2.1"
11X4.50-5	6PR TL	277	99	325	46	5x3"
11X600-5B	2PR TL	285	130	440	50	5x3"
*300X70-6	2PR TL	300	70	330	N	6x2.75"
12X4.00-5	4PR TL	304	107	530	50	5x3"
13X5.00-6	4PR TL	320	121	440	40	6x3.5"
13X6.5-6	4PR TL	335	154	460	28	6x4"
16X6.5-8	4PR TL	408	164	585	45	8x5.375"
4.80-8	4PR TL	408	117	1060	50	8x3.5"
20X10-10	4PR TL	503	234	1160	22	10x7.4"
20X9-12	6PR TL	508	207	1160	30	12x7"
24X12-12	6PR TL	610	309	1160	30	12x10.5"



CT3204

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
22x11-12	4PR TL	559	279	1430	22	12x8.5"



CT438

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
13X5.00-6	4PR TL	320	119	440	40	6x3.5"
15X6.00-6	4PR TL	363.2	147.5	570	30	6x4.5"
16x6.50-8	4PR TL	398.8	177.8	620	28	8x5.375"
18x8.50-8	4PR TL	452.1	216	815	22	8x7"
18x9.50-8	4PR TL	460	236.2	1040	24	8x7"
20x10-8	4PR TL	498	249	1190	22	8x7"
20x10-10	4PR TL	500.4	246.4	1160	22	10x8.0"



CT2103

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
18X9.50-8	4PR TL	460	235	1034	24	8x7"
20X8.00-8	4PR TL	495	221	950	22	8x7"
20X10-8	4PR TL	508	254	1190	22	8x7"
20X12-8	4PR TL	499	289.5	1433	22	8x7.187"
22X10-10	4PR TL	551	233.7	1344	22	10x8.5"
22X12-10	4PR TL	551	289.5	1609	22	10x8.5"
22X11.00-10	4PR TL	550	267	1480	22	10x8"
23X9-12	4PR TL	574	241	1200	20	12x7"
23X10-12	4PR TL	579	295	1710	20	12x8.5"



CT404

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
10X4.50-5	4PR TL	260	135	160	50	5x4.5"
11X7.10-5	4PR TL	290	195	170	50	5x7"
1.6X7.50-10	2PR TL	410	206	600	20	10x7"
18X7-10	2PR TL	456	215	700	20	10x7"



CT599

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
70/65R5	2PR TL	218	70	220	30	8.5x2.75"
90/70R6.5	2PR TL	285	90	187	40	11.5x3.5"



CTK01

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
180/40-5.5	4PR TL	257	182	330	20	7.1x5.5"



CTK02

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
10X6.00-5.5	4PR TL	254	162	180	20	5.1x4.5"



CTK03

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
1.6X7.7-10	2PR TL	400	174	600	41	10x6"
18X7.7-10	2PR TL	454	213	700	20	10x7"



CT561

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)
8x2.00-5	2PR TL	203	50	330	70



CT562

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)
7x2.00	2PR TL	178	50	330	50



CT601

KARTING

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
16x6.50-8	4PR TL	400	162	415	20	8x5.375 "



雪胎

CT398

SNOW THROWER

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.10-4	2PR TL	280	94	300	20	4x2.6"
4.10/3.50-6	2PR TL	314	85	300	24	6x3.3"
4.10-6	2PR TL	315	102	300	24	6x3.3"
4.80/4.00-8	2PR TL	420	115	435	30	8x3.5"
15x5.00-6	2PR TL	366	127	365	20	6x3.5"
18X6.50-8	4PR TL	445	170	518	24	8x5.375"



CT467

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.80-8	2PR TL	424	122	435	20	8x3.75"
13X5.00-6	2PR TL	325	127	295	20	6x3.5"
16X6.50-8	2PR TL	419	155	415	14	8x5.375"



CT478

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.10-4	2PR TL	282	90	210	20	4x2.6"
4.10-6	2PR TL	325	102	290	24	6x3.3"
4.80-8	2PR TL	425	114	435	20	8x3.75"
13X5.00-6	2PR TL	325	119	295	20	6x3.5"
15X5.00-6	2PR TL	370	129	430	18	6x4"
16X6.50-8	2PR TL	404	162	415	14	8x5.375"
18X7.00-8	4PR TL	480	178	400	20	8x5.735"



CT917 **GOLFCAR**

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
215/35-14	4PR TL	478	203	705	30	12x7"
215/40-12	4PR TL	503	195	705	30	14x7"
205/30-14	4PR TL	513	200	680	30	14x7"
205/40-14	4PR TL	523	199	680	30	14x7"



CT168

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
13X5.00-6	4PR TL	335	126	350	35	6x3.5"



CT539

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
15x6.00-6	2PR TL	370	157	418	20	6x4.5"
20x8.00-8	4PR TL	494	227	616	20	8x5.5"



CT389

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
13x6.50-6	2PR TL	330	152	418	28	6x4.5"
15X6.00-6	2PR TL	370	157	462	20	6x4.5"
18X6.50-8	6PR TL	432	186	815	20	8x5.375"
18X8.50-8	4PR TL	450	215	815	15	8x7"
20X8.00-8	4PR TL	494	227	616	20	8x5.5"
190/50-12	6PR TL	510	203	1012	38	12x7"



CT389A

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
18x8.50-8	4PR TL	450	215	815	15	8x7"



CT993

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
205/30-14	4PR TL	513	200	680	30	14x7"
205/40-14	4PR TL	523	199	680	30	14x7"
205/50-10	4PR TL	478	190	680	30	10x6"
205/55-10	4PR TL	483	213	910	35	10x7"
205/65-10	4PR TL	528	221	910	35	10x7"
215/40-12	4PR TL	473	205	705	30	12x7"
215/50-12	4PR TL	527	207	705	30	12x7"
225/55B12	6PR TL	554	225	1235	55	12x7"



CT557

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.00-4	2PR TL	280	100	230	24	4x2.6"
4.00-4	4PR TL	305	105	230	40	4x2.6"
13x4.00-6	2PR TL	322	102	205	30	6x3.25"
13x5.00-6	2PR TL	325	114	295	20	6x3.25"
13x6.00-6	4PR TL	345	148	396	31	6x4.5"
4.80-8	2PR TL	417	119	340	32	8x3.75"
16x6.50-8	4PR TL	420	165	615	28	8x5.375"
16x6.50-8	6PR TL	410	170	1500	90	8x5.375"
20X10-8	4PR TL	482	235	1227	22	8x7"
21X10-10	6PR TL	525	240	1160	40	10x7.5"
23x8.5-12	6PR TL	584	216	1060	40	12x 7"



CT556

BAR&LUG

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
16X6.50-8	4PR TL	400	160	220	14	8x5.375"



CT557A

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
16X6.50-8	12PR TL	410	165	1320	90	8x5.375"



CT557B

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
20X8-10	4PR TL	507	196	900	44	10x6"



CT557C

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
16X6.50-8	4PR TL	406	165	640	28	8x5.375"
18X8.50-10	4PR TL	447	208	795	22	10x7"
20X10-10	4PR TL	495	245	1160	40	10x7.5"



CT395

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
23X8.5-12	4PR TL	584	213	1100	22	12x7"



CT559

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
18X8.50-8	4PR TL	450	213	780	22	8x7"



CT560

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
15X6.00-6	4PR TL	375	135	550	30	6x4"



CT600

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
22X10-9	6PR TL	513	255	353	45	9x7.5"



CT502

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
20x9-12	6PR TL	506	204	1260	32	12x7"
20x10-10	6PR TL	498	230	1650	40	10x7"



CT916

ATV TIRE

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
23x10-12	4PR TL	567	230	1060	20	12x7"
23x10-14	4PR TL	574	221	1060	20	14x7.0"



CT299

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
25X12.5-12	8PR TL	635	293	2000	30	12x10.5"



CT915

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
22X10-14	4PR TL	528	220	815	36	14x7"
23X10-12	4PR TL	565	230	1000	20	12x7"
23X10-14	4PR TL	565	223	1350	20	14x7"



CT590 PATHFINDER

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
25X11-12	4PR TL	636	267	660	24	12x8.5"



CT602

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
22X7-11	6PR TL	530	178	247	45	11x5.5"



CT530

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
145/70-6	4PR TL	350	160	160	24	6x4.5"
16x8.00-7	4PR TL	397	188	180	24	7x5"
21X7-10	6PR TL	540	200	280	24	10x5.5"
22X7-10	6PR TL	550	190	275	25	10x5.5"
22x9-10	4PR TL	552	224	500	22	10x7"
22x10.00-10	4PR TL	537	225	500	22	10x8"
22x11.00-10	4PR TL	537	225	500	22	10x8.5"
23x7.00-10	4PR TL	570	187	264	24	10x8.5"



CT531

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
19X7-8	4PR TL	490	187	400	20	8x7"



CT531A

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
16X8-7	4PR TL	397	188	160	24	7x5.5"



CT532

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
145/70-6	4PR TL	350	160	176	24	6x4.5"
16x8.00-7	4PR TL	416	170	375	24	7x5.5"
20X10-10	4PR TL	510	223	300	15	10x7 "
21X7-10	4PR TL	525	187	284	30	10x6"



CT533

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
21X10-12	6PR TL	530	230	1060	20	12x7"



CT535

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
22X11-10	4PR TL	574	246	500	24	10x8"



CT536

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
18x9.5-8	4PR TL	457	241	253	24	8x7"
19x7.00-8	4PR TL	482	178	253	24	8x6"



CT585

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
25x8-12	6PR TL	630	203	330	30	12x7"
25x10-12	6PR TL	630	255	385	30	12x8"



CT908

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
16x8-7	4PR TL	397	188	180	24	7x5.5"
19x7-8	4PR TL	483	187	204	24	8x7"



CT479

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
22x11-8	4PR TL	565	230	410	14	8x7"



CT3055

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
25x8-12	6PR TL	638	191	1155	33	12x7"
25x10-12	6PR TL	635	245	595	33	12x8"



CT127

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
25x8-12	6PR TL	630	203	330	30	12x7"
25x10-12	6PR TL	630	255	385	30	12x8"
26x9-12	6PR TL	641	226	481	45	12x7"
26x11-12	6PR TL	641	300	430	40	12x10"



CT928

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
22X10-14	4PR TL	559	220	1100	36	14x7"



CT101

TRAILER



SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.80-8	4PR TL	400	116	390	30	8x3.75"
5.70-8	6PR TL	455	144	910	75	8x4.5"
4.80-12	4PR TL	511	121	780	60	12x3.5"



CT102

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
175/80D13	6PR TL	600	180	1400	50	13x16"



CT365 TRAILER

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
6.00-9	10PR TL	540	165	1716	100	9x5.375"



CT352 *HAND TRUCK*

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.10/3.50-4	4PR TL	277	93	350	24	4x2.6"
4.10/3.50-5	4PR TL	299	100	395	30	5x2.1"
4.10X3.50-6	4PR TL	321	96	440	35	6x3.3"
4.80-8	4PR TL	412	102	473	30	8x3.75"



CT353

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.10/3.50-4	4PR TL	264	86	350	35	4x2.6"
4.80-8	4PR TL	412	102	473	35	8x3.75"
530-6	4PR TL	364	130	635	36	6x3.5"



CT353A

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.10/3.50-4	4PR TL	277	92	260	50	4x2.6"
4.10X3.50-5	4PR TL	299	100	395	30	5x2.1"
4.10-6	4PR TL	320	92	440	35	6x3.3"
4.80-8	4PR TL	412	102	473	30	8x3.75"



CT355

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
3.50-5	4PR TL	299	92	250	35	5x2.5"



CT573

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.10X3.50-4	4PR TL	304	104	540	35	4x2.6"
3.00-4	4PR TL	269	86	375	30	4x2.1"
4.80/4.00-8	4PR TL	410	115	610	30	8x2.75"



CT522

UTILITY CART

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.00-8	6PR TL	415	1110	340kg	50	8x3.75 "



CT565

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.10/3.50-5	4PR TL	299	100	395	30	5x2.1 "



CT563

UTILITY CART

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
2.50-4	2PR TL	216	49	300	50	4x1.75 "



CT567

UTILITY CART

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.10/3.50-4	4PR TL	273	92	395	50	4x2.6 "



CT564

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
2.80/2.50-4	2PR TL	200	57	300	40	4x1.75 "



CT568

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
2.50-6	2PR TL	274	65		35	6x1.75 "



CT569

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.00-8	2PRTL	409	104	435	36	8x2.75 "
	4PRTL	409	104	670	60	



CT583

SIZE	PLY PATING	OD(MM)	S.W.(MM)	MAX LOAD CAPACITY(LBS)	MAX (PSI)	RIM (INCH)
4.00-8	4PRTL	413	118	615	36	8x2.75 "



80/80-14	90/80-17
90/80-14	90/90-17
60/70-17	100/80-17
60/80-17	2.25-17
60/90-17	2.50-17
70/70-17	2.75-17
70/80-17	2.25-18
70/90-17	2.50-18
80/80-17	2.75-18
80/90-17	

MR-001



70/90-17
80/90-17
2.50-17
2.75-17
3.00-17
2.75-18
3.00-18

MR-002



70/90-14
2.75-18
3.00-18

MR-003A



60/80-14	60/80-17
70/80-14	70/70-17
70/90-14	70/90-17
80/90-14	80/90-17
90/90-14	2.25-17
45/90-17	2.50-17
50/80-17	2.50-18
60/70-17	2.75-18

MR-003B



2.50-17
2.75-17

MR-004A



2.25-17

MR-004B



2.50-18

MR-005



2.75-14	2.75-17
2.25-16	3.00-17
3.00-16	2.50-18
3.50-16	2.75-18
2.25-17	3.00-18
2.50-17	2.25-19

MR-007



2.50-16
2.50-17

MR-008



2.75-18

MR-013



2.50-17
2.75-17
2.50-18
2.75-18

MR-014



2.75-18

MR-015



2.25-17
2.50-17
2.75-17
2.50-19

MR-009



360H18

MR-010



3.00-16
2.50-17
3.00-17
2.25-18
2.50-18
3.00-18

MR-017



3.00-17

MR-017B



3.00-18

MR-018



2.25-17	2.75-18
2.50-17	3.00-18
2.75-17	2.75-19
3.00-17	3.25-19
80/100-18	3.25-21
2.50-18	

MR-011



3.00-16
2.75-18

MR-012



3.00-17
2.75-18
3.00-18

MR-021



3.25-16
2.50-17
2.75-17
3.00-17
2.75-18
3.00-18

MR-022



3.25-16
2.50-17

MR-023



80/100-14
2.75-16
3.25-16
60/100-17
2.50-17
2.75-18
90/90-18

MR-024



110/90-16
90/90-17
2.75-18
90/90-18

MR-026



3.75-19

MR-027



2.50-17

MR-033




130/90-15
110/90-16

MR-034



110/90-16
3.50-16
3.00-17
3.00-18

MR-035



2.50-16
2.75-16
2.50-17
2.75-17

MR-028



80/90-10	80/90-17
80/100-14	90/80-17
60/70-17	90/90-17
60/80-17	2.50-17
60/90-17	2.75-17
70/70-17	60/80-18
70/80-17	80/80-18
70/90-17	2.50-18
80/80-17	2.75-18

MR-029



5.00-12

MR-036



3.50-8
3.50-10
4.00-10
3.00-12
3.50-12
3.75-12
4.00-12

MR-037




3.50-8

MR-038




2.50-17
2.75-17

MR-030



2.50-17

MR-031



2.50-17

MR-032



3.00-8
3.00-10
3.50-10

MR-039



4.00-8
3.50-10
80/90-10
90/90-10
90/90-12

MR-041



120/70-12
130/70-12
110/90-16

MR-042



4.00-8

MR-043



90/90-10	110/60-12
110/70-10	120/60-12
110/80-10	120/70-12
130/70-10	130/70-12
130/90-10	110/90-13
90/90-12	130/60-13
100/80-12	130/90-13

MR-044



110/90-16
2.50-17
2.75-17
3.00-17
2.75-18
3.00-18
3.25-18
3.50-18

MR-049



2.50-17
2.75-17
3.00-17
3.00-18
2.75-19
3.75-19

MR-051



3.25-18

MR-051B



4.00-8

MR-045



4.00-12
4.50-12
130/90-15

MR-046



2.75-14
3.00-17
2.75-18
3.00-18

MR-051F



2.75-14
2.50-17
2.75-17
3.00-17
2.75-18
3.00-18

MR-052A



2.50-17
3.00-17
3.00-18

MR-052B



2.25-16	3.00-17
2.50-16	3.25-17
3.00-16	2.50-18
3.25-16	2.75-18
2.50-17	3.00-18

MR-047



3.00-17
3.00-18

MR-048



3.50-16
3.00-17
3.00-18

MR-052D



110/90-16
3.00-18

MR-053



2.75-18
4.10-18
2.75-21

MR-054



3.00-18
90/90-18

MR-055



2.75-17
3.00-17
3.00-18

MR-055A



70/90-17
80/90-17
90/90-18

MR-062



130/60-13

MR-063



3.50-10	110/80-17
2.50-14	110/90-17
90/100-14	2.75-18
110/90-16	3.00-18
2.50-17	4.10-18
3.00-17	4.60-18
3.50-17	90/90-18
4.10-17	2.75-19
4.60-17	2.75-21
90/90-17	

MR-056



2.50-17
2.75-17
3.00-17
3.50-17
2.50-18

MR-057



2.50-17
2.75-17
3.00-17
2.50-18

MR-067



3.00-17
3.00-18

MR-068



4.00-8

MR-069



3.50-16
3.00-17
3.00-18

MR-058



110/90-16
3.00-18

MR-059



80/100-14
250-17
60/80-17
70/80-17
70/90-17
80/90-17
90/80-17
250-18
275-18
90/90-18

MR-061



3.00-16
2.75-17
3.00-17
3.00-18

MR-070



4.00-8

MR-071



4.00-8

MR-072



4.00-10

MR-073



4.00-10

MR-073A



4.00-8

MR-074



3.50-16
3.00-17
3.00-18

MR-083



145-12

MR-085



3.00-17
3.00-18

MR-086



4.00-8

MR-075



5.00-12

MR-076



135-10
135/90-10
4.00-10
5.00-10
100/95-12
125/65-12

MR-077



3.00-17
3.00-18

MR-087



3.00-17
3.00-18

MR-088



60/80-17
60/90-17
70/80-17
70/90-17
80/80-17
80/90-17
90/80-17
60/80-18
70/80-18

MR-089



2.75-17
3.00-17
3.00-18

MR-078



2.75-17
3.00-17
100/90-17
2.75-18
3.00-18

MR-079



2.75-17
3.00-17
2.75-18
3.00-18

MR-081



300-17

MR-090



4.00-8

MR-091



4.00-10

MR-092



4.00-8

MR-093



3.00-17
3.00-18

MR-095



110/70-13	300-17
130/70-13	90/90-17
90/90-14	110/80-17
110/80-14	275-18
140/70-14	300-18
110/90-16	410-18
250-17	90/90-18
275-17	

MR-101



2.75-17
3.00-17
2.75-18
3.00-18
3.25-18
3.50-18

MR-102



3.00-17

MR-096



2.75-17
3.00-17

MR-097



3.00-17
3.00-18

MR-103



3.25-18
80/90-16

MR-105



90/100-16	2.50-18
4.10-16	2.75-18
2.50-17	3.00-18
2.75-17	4.10-18
3.00-17	70/100-19
90/100-17	2.75-21

MR-098



3.00-17
3.00-18

MR-099



300-12	90/90-17
350-12	100/80-17
375-12	100/90-17
400-12	120/80-17
225-14	130/70-17
250-14	140/70-17
275-14	275-18
250-17	90/90-18
275-17	100/90-18
300-17	110/90-18
80/90-17	

MR-106



100/90-10
120/70-12
130/70-12
110/70-16

MR-107



90/90-18

MR-108



90/90-17
100/80-17
110/90-17
120/80-17

MR-109



110/90-16
350-17
410-17
460-17
300-18
410-18

MR-110



3.00-17

MR-125



140/60-17

MR-126



140/60-17

MR-127



2.75-18

MR-112



500-12
550-13

MR-115



300-17
110/90-17
120/90-17
410-18
120/90-18
90/90-19
300-21

MR-116



130/90-10

MR-128



100/90-10
110/90-10
120/90-10
130/90-10
110/90-12

MR-132



120/80-17

MR-136



110/90-17
120/90-17
120/90-18
90/90-19
90/90-21

MR-117



130/90-15
110/90-16

MR-118



120/70-12

MR-120



4.10-18

MR-14T



110/90-16

MR-141



90/90-17
100/80-17
110/70-17
110/80-17
140/60-17
140/70-17

MR-143



60/80-17
60/90-17
70/80-17
70/90-17

MR-161



2.50-17
2.75-17
3.00-17
90/90-17
100/80-17

MR-200



250-17
275-17
300-17

MR-303



130/60-13

MR-503



130/60-13

MR-506



90/65-8
130/50-8
130/60-10
130/70-10
130/60-11
100/60-12
110/70-12

MR-513



2.75-18

MR-311



3.00-18

MR-312



2.75-17
3.00-17

MR-313



300-8	80/80-11	350-16
350-8	80/85-11	110/90-16
275-10	90/80-11	250-17
300-10	110/70-11	275-17
350-10	300-12	275-18
80/90-10	350-12	300-18
90/90-10	80/90-12	90/90-18
100/80-10	90/90-12	14x2.125
100/90-10	110/70-12	14x2.5
120/70-10	120/70-12	16x2.5
120/90-10	130/70-12	16x3.0
130/90-10	130/60-13	

MR-507



14x2.125
14x2.5
16x2.125
16x2.5
16x3.0
18x2.125
18x2.5

MR-518



3.00-17
3.00-18

MR-314



2.75-17
3.00-17
3.00-18

MR-318



3.00-17
3.00-18

MR-501



250-10
275-10

MR-519



10x3.0

MR-529



3.00-10
3.50-10

MR-548



300-10
350-10
100/90-14
300-17
50/100-17
300-18

MR-561



90/90-12
90/90-14
110/80-14
140/70-14

MR-562



3.00-10
3.50-10

MR-563



80/100-14
90/100-14
90/100-16

MR-808



14x2.5	90/80-11	130/70-12	90/90-17
300-8	100/80-11	140/70-12	100/80-17
275-10	110/70-11	130/60-13	110/70-17
300-10	80/80-12	100/80-14	110/80-17
80/70-10	90/70-12	110/80-14	120/80-17
80/80-10	90/80-12	130/70-14	130/70-17
100/80-10	100/60-12	140/60-14	140/70-17
110/90-10	100/80-12	100/80-16	160/60-17
120/70-10	110/70-12	130/70-16	100/80-18
130/60-10	110/80-12	130/90-16	100/90-18
80/85-11	120/70-12	80/100-17	110/80-18

MR-823



100/90-8
300-10
350-10
90/90-10
100/90-10

MR-564



110/90-16

MR-576



3.00-10

MR-597



2 1/4-16

MR-851



2.25-17
2 1/4 - 18
2.25-18

MR-852



130/90-15

MR-853



90/90-18

MR-800



140/90-15
130/90-16
250-17
275-17
90/80-17
100/80-17
100/90-17
140/70-17
275-18
300-18
80/100-18
90/90-18
100/90-18
110/90-18

MR-806



70/100-17
275-18
90/90-19

MR-807



110/90-13
275-18
300-18

MR-855



375-19

MR-856



400-10
300-12
350-12
375-12
400-12
250-14
275-14

MR-860



2.75-21

MR-884



90/90-19
460-18

MR-891



80/100-21

MR-895



10x3.00-6	275-17	410-18
275-8	300-17	90/90-18
350-8	110/90-17	100/90-18
90/80-10	120/90-17	120/90-18
95/80-10	130/80-17	480/100-8
80/100-14	140/70-17	90/90-19
350-16	150/70-17	110/80-19
90/100-16	275-18	275-21
110/90-16	300-18	90/90-21
250-17	350-18	

MR-923



2.75-18

MR-923A



100/100-17
90/90-18
100/100-18
110/90-18
110/100-18
110/100-19
90/90-21
90/100-21

MR-897



3.00-21

MR-898



110/70-17
110/80-17
120/70-17
120/80-17
130/70-17
140/60-17
140/70-17

MR-900



110/80-17
130/70-17

MR-931



110/90-17

MR-932



100/90-18

MR-936



225-17
250-17
275-17
225-18
250-18
275-18

MR-920



70/100-17
275-18
90/90-19

MR-921



275-18

MR-922




90/90-18
100/90-18

MR-938



60/100-17
275-18

MR-938F



80/100-14
460-17
400-18
90/90-19
300-21

MR-939



4.00-8

MR-956



110/90-16
110/90-17
120/90-17
110/80-18
90/90-19
80/90-21

MR-970

TUBE

SIZE	VALVE
4"	6*2 CR202
10*2 2.125 CR202	
200*50 CR202	
2.50-4 TR1/TR87/DIN7777	
3.00/3.50-4 TR1/TR87/DIN7777	
4.10/3.50-4 TR1/TR87	
5"	3.50-5 TR87
4.00-5 TR87	
6"	3.50-6 TR1
4.00-6 TR1/TR87	
13x5.00-6 TR13/TR87	
600/650-6 TR87	
7"	350-7 TR13
400-7 TR13	
8"	3.00/3.25-8 TR1/TR87
3.50-8 TR1/TR87	
4.00-8 TR13/TR87	
16*650-8 TR13	
16*700-8 TR13	
17*800-8 TR13	
18*850-8 TR13	
20*10.00-8 TR13	
10"	2.75-10 TR87
3.00-10 80/90-10 90/90-10 TR4/TR87	
3.50-10 100/80-10 100/90-10 TR4/TR13/TR87	
4.00/4.50-10 20*10.00-10 TR4/TR13/TR87	
12"	2.75/3.00-12 TR4
3.50/4.00-12 120/70-12 130/70-12 TR4/TR13/TR87	
4.00/4.50-12 110/90-12 TR4/TR13/TR87	
13"	3.50/4.00-13 120/70-13 130/70-13 TR4/TR13/TR87
155/165-13 TR4/TR13	
14"	2.25-14 TR4
2.50-14 70/90-14 TR4	
2.75-14 80/80-14 80/90-14 80/100-14 TR4	
3.00-14 90/90-14 90/100-14 TR4	
175/185-14 TR4/TR13	
15"	130/90-15 TR4/TR13
175/185-15 TR4/TR13	

SIZE	VALVE
16"	2.25-16 TR4
2.50-16 70/80-16 70/90-16 70/100-16 TR4	
2.75-16 80/100-16 TR4	
3.00-16 90/70-16 90/80-16 90/90-16 90/100-16 TR4	
3.25/3.50-16 110/90-16 TR4	
4.00/4.50-16 120/90-16 TR4	
4.50/5.10-16 130/90-16 TR4	
17"	1.85-17 45/70-17 TR4
2.00-17 50/80-17 50/90-17 50/100-17 TR4	
2.25-17 60/70-17 60/80-17 60/90-17 60/100-17 TR4	
2.50-17 70/70-17 70/80-17 70/90-17 70/100-17 TR4	
2.75-17 80/80-17 80/90-17 80/100-17 TR4	
3.00-17 90/80-17 90/90-17 TR4	
3.25/3.50-17 100/80-17 100/90-17 100/100-17 TR4	
3.50/4.00-17 110/80-17 110/90-17 110/100-17 120/80-17 120/90-17 TR4	
4.60-17 4.50/5.10-17 130/70-17 130/80-17 TR4	
18"	2.25-18 60/80-18 TR4
2.50-18 70/80-18 70/90-18 70/100-18 TR4	
2.75-18 80/80-18 80/90-18 80/100-18 TR4	
3.00-18 90/70-18 90/80-18 90/90-18 90/100-18 TR4	
3.25-18 100/70-18 100/80-18 100/90-18 100/100-18 TR4	
3.50/4.10-18 110/90-18 110/100-18 TR4	
4.00/4.50-18 120/80-18 120/90-18 130/90-18 TR4	
19"	275/300-19 70/100-19 80/100-19 90/90-19 TR4
21"	275/300-21 80/90-21 80/100-21 90/90-21 90/100-21 100/80-21 TR4



2.80/2.50-4



3.00-4-1



3.00-4-2



3.00-8



3.25-8



3.50-4



3.50-4-2



3.50-4-3



3.50-4-4



3.50-4-5



3.50-4-6



3.50-4-7



3.50-4-8



3.50-4 方块



3.50-7



3.50-8-1



3.60-6



4.00-4



4.00-6



4.00-6 直纹



4.00-8 农用



4.00-8-1



4.00-8-2



4.00-8-3





农用车钢圈

Steel ring for agricultural vehicles

编号 ItemNO	规格 Size	螺栓孔分布 PCD	中心孔直径 CenterHole	偏距 Offset
HR101	10×6	5-114.3/140	72/94	-51-20
HR102	10×7	5-114.3/140	72/94	-60-25
HR103	10×8	5-114.3/140	72/94	-60-30
HR104	12×4	4/5-114.3/140	60/72/94	0
HR105	12×5	4/5-114.3/140	60/72/94	0
HR106	12×6	4/5-114.3/140	60/72/94	-50-20
HR107	12×7	4/5-114.3/140	60/72/94	-60-25
HR108	12×8	4/5-110/140	68/80	-60-35
HR109	12×8.5	4/5-110/140	68/80	-60-35
HR110	12×10.5	4/5-110/140	68/80	-70-45
HR111	14×5	5/6-170	117/135	-35-10
HR112	14×7	5/6-170	117/135	-35-10
HR113	15×6	5/6-170	117/135	-35-10
HR114	15×8	5/6-170	117/135	-35-10
HR115	15×10	5/6-170	117/135	-35-10
HR116	15.3×9	5/6-205	120/158/161	-25-0
HR117	15.5×13	5/6-205	120/158/161	-25-15
HR118	16×5	5/6-205/139.7	110/162	-10-0
HR119	16×6	5/6-205/139.7	110/162	-10-0
HR120	16×8	5/6-205/139.7	110/162	-10-0
HR121	16.1×11	6-205	161	0
HR122	16.1×14	6-205	161	0
HR123	16.5×8.25	6-150	90	-25-10
HR124	16.5×9.75	6-152	117.5	-45-15
HR125	18×8	6-152.4	1.7	-25-10
HR126	20×11	9-241.3	201.6	0

草坪草、工具车钢圈

Lawn car, tool car steel ring

编号 ItemNO	规格 Size	螺栓孔分布 PCD	中心孔直径 CenterHole	偏距 Offset
HR101	10×6	5-114.3/140	72/94	-51-20
HR102	10×7	5-114.3/140	72/94	-60-25
HR103	10×8	5-114.3/140	72/94	-60-30
HR104	12×4	4/5-114.3/140	60/72/94	0
HR105	12×5	4/5-114.3/140	60/72/94	0
HR106	12×6	4/5-114.3/140	60/72/94	-50-20
HR107	12×7	4/5-114.3/140	60/72/94	-60-25
HR108	12×8	4/5-110/140	68/80	-60-35
HR109	12×8.5	4/5-110/140	68/80	-60-35
HR110	12×10.5	4/5-110/140	68/80	-70-45
HR111	14×5	5/6-170	117/135	-35-10
HR112	14×7	5/6-170	117/135	-35-10
HR113	15×6	5/6-170	117/135	-35-10





高尔夫、沙滩车钢圈

Golf, ATV steel rim

编号 emNO	规格 Size	螺栓孔分布 PCD	中心孔直径 CenterHole	偏距 Offset
HR301	6×4	3-90.4-110	55/64	0
HR302	8×3.75	4-101.6/110/100 5-114.3	60/72	0
HR303	8×5.375	4-101.6/110/100 5-114.3	60/72	0
HR304	8×5.5	4-101.6/110/100 5-114.3	60/72	0
HR305	8×7	4-101.6/110/100 5-114.3	60/72	-13-10
HR306	10×5.5	4-101.6/110/100 5-114.3/40	60/72/94	0
HR307	10×6	4-101.6/110/100 5-114.3/40	60/72/94	-6-0
HR308	10×7	4-101.6/110/100 5-114.3/40	60/72/94	-13-10
HR309	10×8	4-101.6/110/100 5-114.3/40	60/72/94	-26-10
HR310	12×6	4-101.6/110/100 5-114.3/40	60/72/94	-6-0
HR311	12×7	4-101.6/110/100 5-114.3/40	60/72/94	-13-10
HR312	12×8	4-101.6/110/100 5-114.3/40	60/72/94	-26-10



拖车、雪地车钢圈

Trailer, snowmobile steel ring

编号 ItemNO	规格 Size	螺栓孔分布 PCD	中心孔直径 CenterHole	偏距 Offset
HR401	8×3.75	4/5-101.6/114.3	72	0
HR402	10×6	4/5-101.6/114.3	72	0
HR403	12×4	4/5-101.6/114.3	72	0
HR404	13×4	4/5-101.6/114.3	72	0
HR405	13×4.5	4/5-101.6/114.3	68/72	0
HR406	13×5	4/5-101.6/114.3	72/84	0
HR407	14×5	4/5-100/101.6/114.3	72/84	0-22
HR408	14×5.5	4/5-100/108.7/114.3	68/84	0-22
HR409	14×6	5/6-108.7/114.3/139.7	72/84	0-40
HR410	14×7	4/5/6-108.7/114.3/139.7	72/84	0-40
HR411	15×5	5/6-114.3/139.7	84/108.7	0-40
HR412	15×6	5/6-114.3/139.7	84/108.7	30-N10
HR413	15×7	5/6-114.3/139.7	84/108.7	40-N10
HR414	15×8	5/6-114.3/139.7	84/108.7	50-N20
HR415	15×10	5/6-114.3/139.7	84/108.7	60-N30
HR416	16×4	5-114.3	64/72	38-55
HR417	16×4.5	5-112	57.1/66.6	33-50
HR418	16×5	5-120	65.1	40-52
HR419	16×5.5	5-120	65.1	40-52
HR420	16×6	5/6-139.7/165.1	65.1/63.3	15-N10
HR421	16×6.5	5-108	0	0
HR422	16×7	5/6-139.7/165.1	108.7/131	20-N10
HR423	16×8	5/6/8-139.7/165.1	108.7/131	35-N25
HR424	16×10	5/6/8-139.7/165.1	108.7/131	60-N50
HR425	17×6.5	5-110	65.8	0
HR426	17×7	5-114.3	71.5	38-50
HR427	18×7	5-114.3	71.5	38-42

车间仓库 / Company profile




特种车钢圈

Special car steel rim

编号 ItemNO	规格 Size	螺栓孔分布 PCD	中心孔直径 CenterHole	偏距 Offset
HR501	8×4.33	4-101.6/110/100 5-114.3	92.8	0
HR502	10×6.9	6-120	79.5	0
HR503	10×8	6-120	50	0
HR504	9×4	6-120	50	0
HR505	9×4.5	6-120	50	0
HR506	14.5×6	9-241.3	201.6	0
HR507	14.5×6.75	9-241.3	201.6	0
HR508		9-241.3	201.6	0



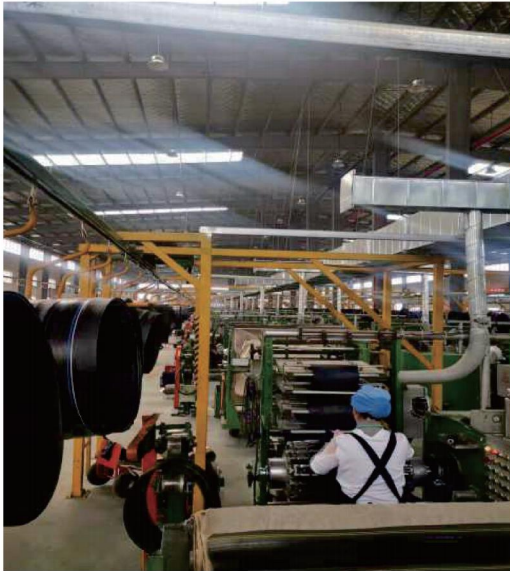

生产车间
WORKSHOP